




## Specifications

Pixels	Single color: 64*512 or 32*1024 Dual color: 64*256 32*512
Communication mode	RS232 Serial port, GPRS
Storage capacity	4M. Can store at least 95pcs programs
Port	Two 08 ports, four 12 ports, one serial port
Compatible	1/16,1/8,1/4 scan <b>single color/dual color</b> LED display
LED brightness	15 grades for optional
Working temperature	-40°C~80°C
Avg. Power consumption	3w
Working voltage	5V (4.2v-6v)

## Interface introduction

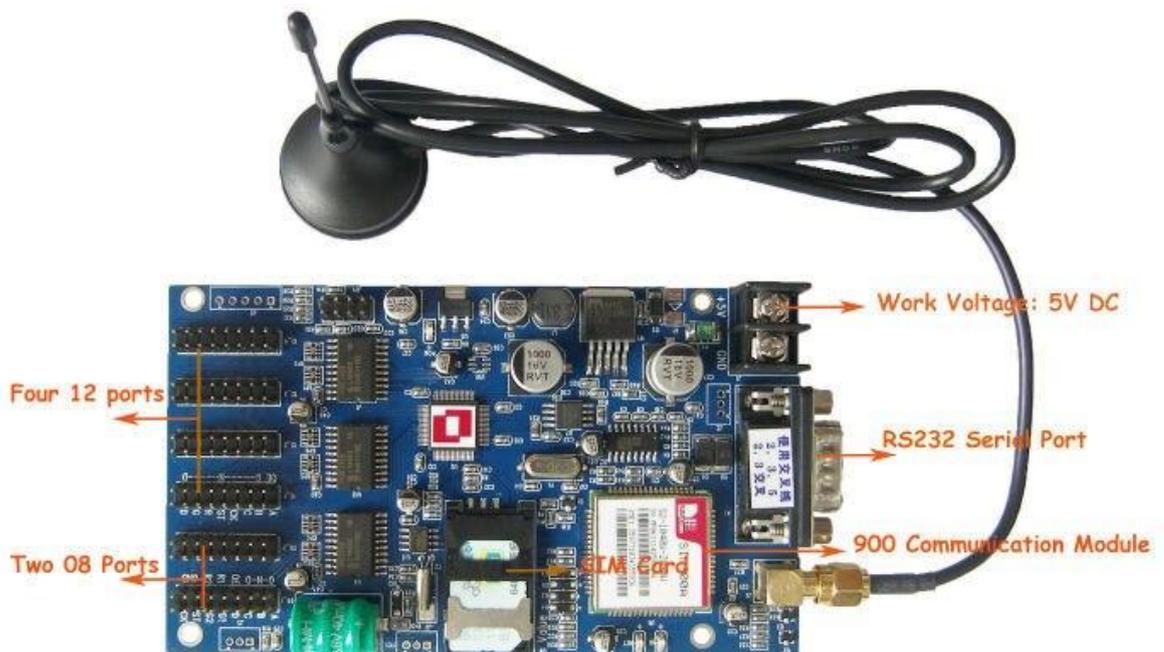

## Advantage

1. Wireless control and remote control
2. Remote turn on/off LED Display
3. Auto checking the connection status of the communication module
4. Permission management: multiple level setting and convenient management and keep security
5. LED display Realtime monitoring: monitoring and remote control the LED display from terminal.
6. High temperature resistance
7. Unique filtering processing
8. Good Anti-interference
9. Easy to operate
10. Imported chip: high quality and better performance
11. Support 45 types words display, customized colorful border, 360 degree rotary words, Multi-area displays
12. One year warranty