


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/09/08'	~	

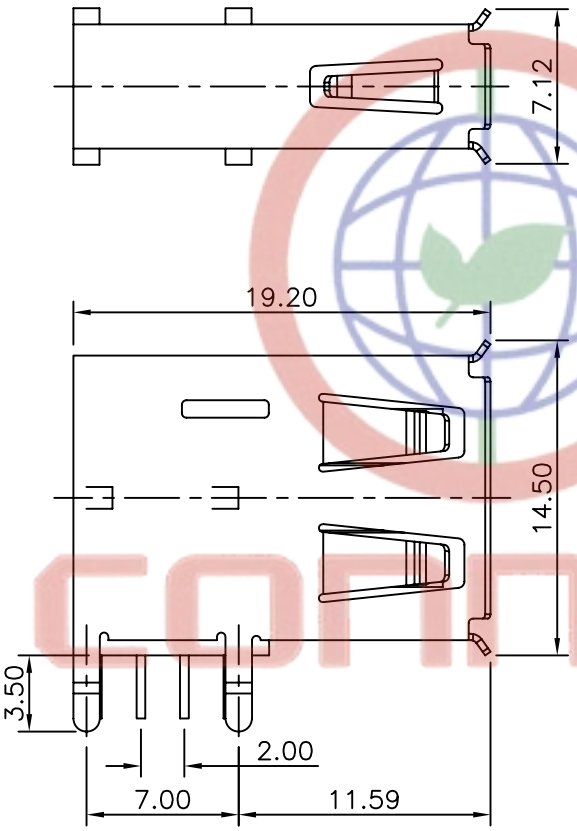

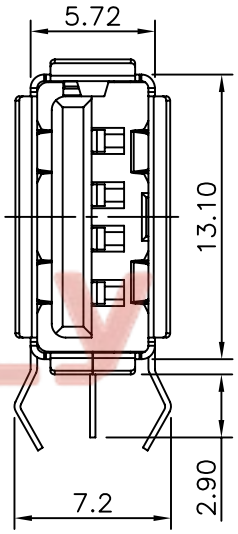

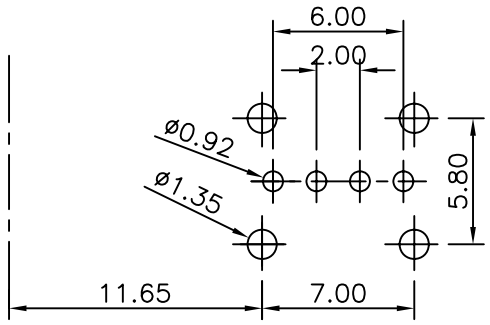

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

1. SPECIFICATIONS:
   - 1.0 CONTACT RESISTANCE: 30mΩ max.
   - 1.1 INSULATOR RESISTANCE: 1000MΩ min.AT DC 500V.
   - 1.2 CURRENT RATING: 1.5A.
   - 1.3 VOLTAGE RATING: 30V AC/DC.
   - 1.4 DIELECTRIC STRENGTH: AC 500V FOR 1 Minute.
   - 1.5 TEMPERATURE RANGE: −40°C ~ +105°C .
2. MATERIALS:
   - 2.0 HOUSING: PBT+30% GLASS FIBER(UL 94−0).
   - 2.1 CONTACT: COPPER ALLOY
   - 2.2 SHELL: COPPER ALLOY.
3. PRODUCT NUMBER CODE:

DS1095−01−X X X X

- CONTACT PLATING
  - 0: Selective gold flash
  - 03: Selective gold 3u"
  - 30: Selective gold 30u"
- MOUNTING TYPE
  - R: R/A
- SHELL PLATING:
  - N: Nickel
  - 6: Tin
- COLOR OF HOUSING:
  - W: WHITE
  - B: Black
- SERIES No.
  - DS1095−01

CONNFLY
Tel:86−574−63508787
Fax:86−574−63510817
E−mail:sale@zhenqin.com.cn
Http://www.connfly.com
No.8 East Industry Zone KuangYan
Town Yuyao Ningbo China
P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1095−01−XXRX		

PROJECTION		TITLE	USB A TYPE UP RIGHT ANGLE TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1095−01 SERIES

CONNFLY 晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD