

FED60 SERIES

DC-DC CONVERTER

2:1 WIDE INPUT RANGE
UP TO 60Watts



FEATURES

- NO MINIMUM LOAD REQUIRED
- 1600VDC INPUT TO OUTPUT ISOLATION
- STANDARD 2.00 X 1.00 X 0.40 INCH
- SIX-SIDED CONTINUOUS SHIELD
- UL60950-1, EN60950-1, & IEC60950-1
UL62368-1, EN62368-1, & IEC62368-1 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	OTP	LOW STANDBY POWER
-------------------	----------------	-----	-----	-----	-----	-----	-------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load (1)
	VDC	VDC	A	mA	%	µF
FED60-12S3P3	9 ~ 18	3.3	12	15	89	32000
FED60-12S05	9 ~ 18	5	12	15	90	30000
FED60-12S12	9 ~ 18	12	5	15	90	5850
FED60-12S15	9 ~ 18	15	4	15	91	3900
FED60-12S24	9 ~ 18	24	2.5	15	92	2000
FED60-12D12	9 ~ 18	±12	±2.5	15	90	±3900
FED60-12D15	9 ~ 18	±15	±2	15	90	±2400
FED60-12D24	9 ~ 18	±24	±1.25	15	91	±1000
FED60-24S3P3	18 ~ 36	3.3	12	10	90	32000
FED60-24S05	18 ~ 36	5	12	10	92	30000
FED60-24S12	18 ~ 36	12	5	10	91	5850
FED60-24S15	18 ~ 36	15	4	10	92	3900
FED60-24S24	18 ~ 36	24	2.5	10	91	2000
FED60-24D12	18 ~ 36	±12	±2.5	10	90	±3900
FED60-24D15	18 ~ 36	±15	±2	10	90	±2400
FED60-24D24	18 ~ 36	±24	±1.25	10	91	±1000
FED60-48S3P3	36 ~ 75	3.3	12	10	90	32000
FED60-48S05	36 ~ 75	5	12	10	92	30000
FED60-48S12	36 ~ 75	12	5	10	92	5850
FED60-48S15	36 ~ 75	15	4	10	92	3900
FED60-48S24	36 ~ 75	24	2.5	10	92	2000
FED60-48D12	36 ~ 75	±12	±2.5	10	91	±3900
FED60-48D15	36 ~ 75	±15	±2	10	91	±2400
FED60-48D24	36 ~ 75	±24	±1.25	10	91	±1000

PART NUMBER STRUCTURE

FED60	-	48	S	05	-	N	HS
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Remote Control options	Assembly Option
		12: 9~18 24: 18~36 48: 36~75	S: Single	3P3: 3.3 05: 5 12: 12 15: 15 24: 24		<input type="checkbox"/> : Positive logic N: Negative logic	<input type="checkbox"/> : None HS: Heat-sink HC: Heat-sink with Clamp
			D: Dual	12: ±12 15: ±15 24: ±24			

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range		12Vin(nom)	9	12	18	VDC
		24Vin(nom)	18	24	36	
		48Vin(nom)	36	48	75	
Start-up voltage		12Vin(nom)			9	VDC
		24Vin(nom)			18	
		48Vin(nom)			36	
Shutdown voltage		12Vin(nom)		8		VDC
		24Vin(nom)		16		
		48Vin(nom)		32		
Start up time	Constant resistive load	Power up Remote ON/OFF		60 60		ms
Input surge voltage	1 second, max.	12Vin(nom)			25	VDC
		24Vin(nom)			50	
		48Vin(nom)			100	
Input filter			Pi type			
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON		Open or 3 ~ 12VDC	mA
		(Standard)	DC-DC OFF		Short or 0 ~ 1.2VDC	
		Negative logic	DC-DC ON		Short or 0 ~ 1.2VDC	
		(Option)	DC-DC OFF		Open or 3 ~ 12VDC	
		Input current of Ctrl pin		-0.5	0.5	
Remote off input current				3	mA	

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load	Single	-0.5		+0.5	%
		Dual	-1.0		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability	Single output	3.3Vout, 5Vout, 12Vout	-10		+10	%
		15Vout, 24Vout	-10		+20	
Ripple and noise	Measured by 20MHz bandwidth With a 10µF/25V X7R MLCC	3.3Vout, 5Vout		75	100	mVp-p
		12Vout, 15Vout		100	125	
		24Vout		150	200	
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection	Zener diode clamp	3.3Vout		3.9		VDC
		5Vout		6.2		
		12Vout		15		
		15Vout		20		
		24Vout		30		
Over load protection	% of Iout rated; Hiccup mode			150		%
Short circuit protection						Continuous, automatic recovery

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600			VDC
		Input (Output) to Case	1600			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					2200	pF
Switching frequency			225	250	275	kHz
Safety approvals						EN60950-1 UL60950-1 IEC60950-1 EN62368-1 UL62368-1 IEC62368-1
Case material						Copper
Base material						FR4 PCB
Potting material						Silicone (UL94 V-0)
Weight						33g (1.16oz)
MTBF	MIL-HDBK-217F, Full load.					8.804 x 10 ⁵ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature		With Derating	-40		+105	°C
Maximum case temperature					+105	°C
Over temperature protection				+115		°C
Storage temperature range			-55		+125	°C
Thermal impedance	Vertical direction by natural convection (20LFM)	Without Heat-sink With Heat-sink		10.8 10.3		°C/W
Thermal shock						MIL-STD-810F
Vibration						MIL-STD-810F
Relative humidity						5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI ⁽²⁾	EN55022	Class A, Class B
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20 V/m	Perf. Criteria A
Fast transient ⁽³⁾	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge ⁽³⁾	EN61000-4-5 ± 2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Note:


1. Test by minimum input and constant resistive load.
2. The standard module meets EMI Class A or Class B with external components. For further information, please contact with P-DUKE.
3. The external input components are required if the module has to meet EN61000-4-4, EN61000-4-5.
The FED60-12□□□ and The FED60-24□□□ recommended an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) to connect in parallel.
The FED60-48□□□ recommended an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V) and a TVS (SMDJ120A, 120V, 3000Watt peak pulse power) to connect in parallel.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

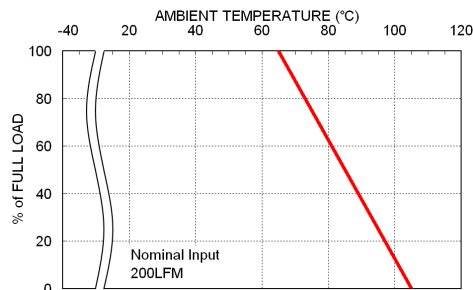

Derating Curve

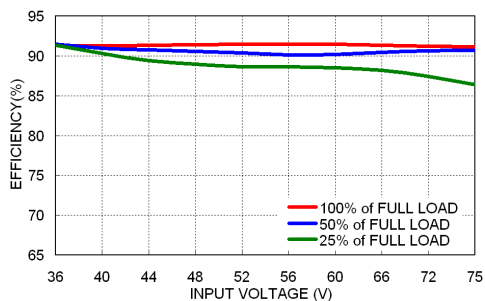


FED60-48S12 Efficiency VS Input Voltage

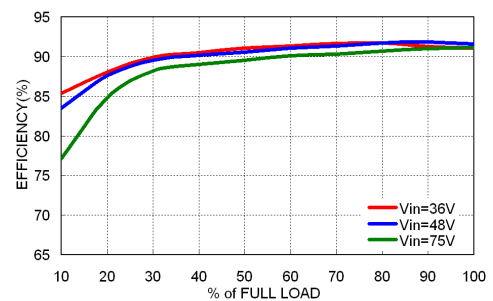

FED60-48S12 Efficiency VS Output Load

MECHANICAL DRAWING

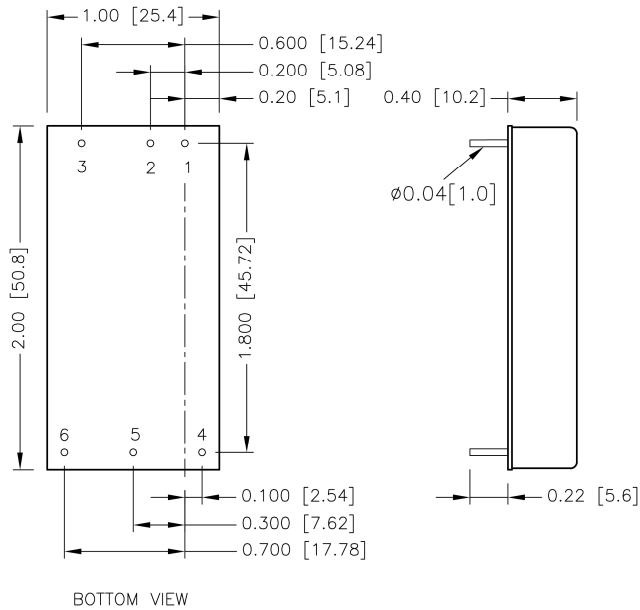


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

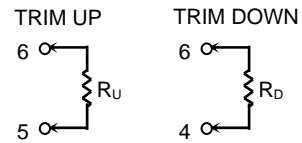

- All dimensions in inch (mm)
- Tolerance : $x.xx \pm 0.02$ ($x.x \pm 0.5$)
 $x.xxx \pm 0.01$ ($x.xx \pm 0.25$)
- Pin pitch tolerance ± 0.01 (0.25)
- Pin dimension tolerance ± 0.004 (0.1)