



Schottky Barrier Rectifiers

Features


- High efficiency operation
- Low power loss
- Low stored charge majority carrier conduction
- High forward surge capability
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std (Halogen Free)

Mechanical Data

- Circuit figure: Common cathode
- Leads: Solderable per mil-std-202, Method 208
- Polarity: as marked
- Mounting torque: 5 in-lbs maximum
- Terminals: Puretin plated
- Weight: TO-220AB 1.85 grams

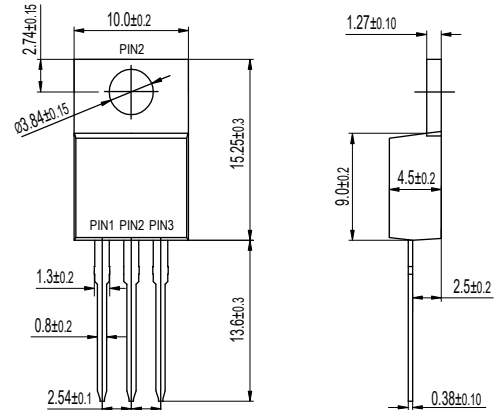

TO-220AB



Maximum Ratings T_A = 25°C unless otherwise specified

RATINGS	SYMBOL	SR2040CT	SR2045CT	SR2060CT	SR20100CT	SR20150CT	SR20200CT	UNIT
Maximum repetitive reverse voltage	VRRM	40	45	60	100	150	200	V
Maximum RMS voltage	VRMS	28	32	42	70	105	140	V
Maximum DC blocking voltage	VDC	40	45	60	100	150	200	V
Maximum average forward current per device per diode	IAV	20 10						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	IFSM	220						A
Typical thermal resistance (Note 1)	Rθ-JC	2.0						°C/W
Operating junction temperature range	TJ	-55 to +150				-55 to +175		°C
Storage temperature range	TSTG	-55 to +175						°C
Maximum forward voltage per leg at IF=10A	VF	0.65		0.75	0.85	0.92		V
Maximum average reverse current at rated DC blocking voltage TJ=25°C TJ=125°C	IR	0.10 15			0.01 5			mA

Characteristic Curves $T_A = 25^\circ\text{C}$ unless otherwise noted

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

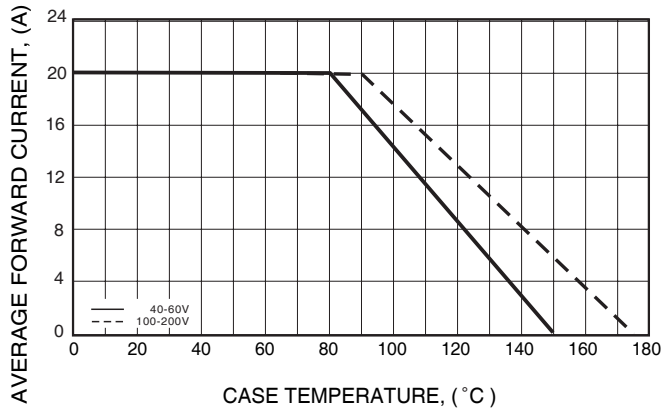


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

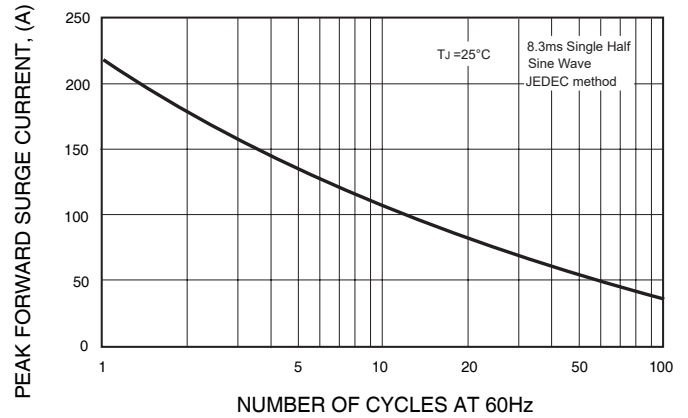


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS


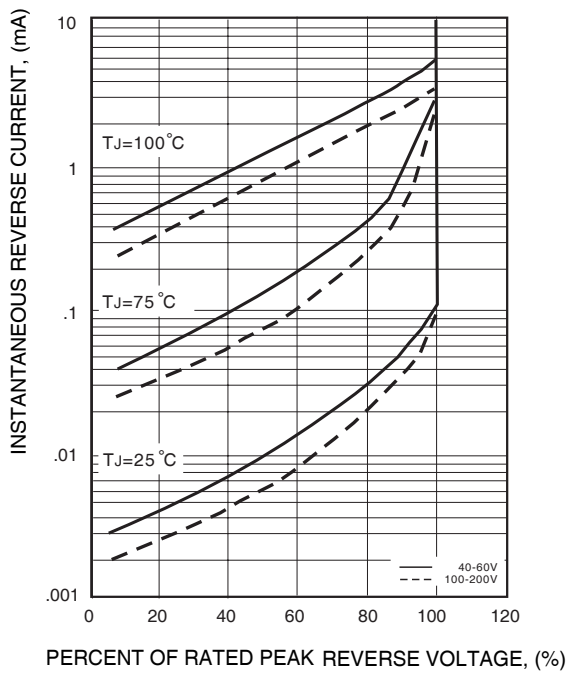


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

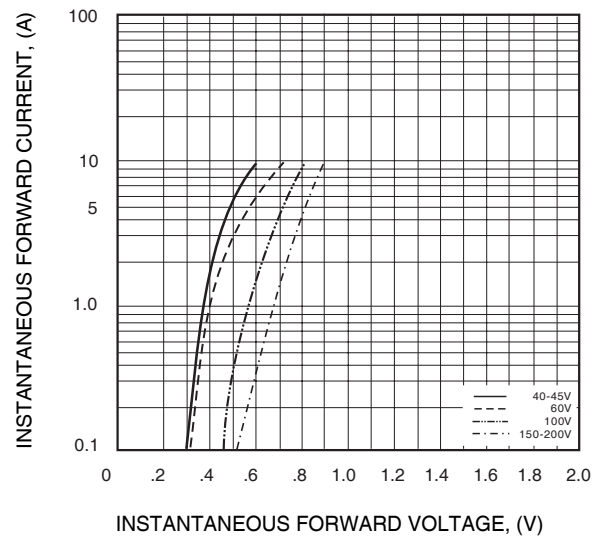

Disclaimer

The information presented in this document is for reference only. Jiangsu Boye Chuangxin Semiconductor Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Boye Chuangxin or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.bycxdiode.com>, Or consult the nearest Sales Office for further assistance.