


## 一、SPECIFICATIONS :

- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 2KV
- 3、Rated Frequency: 50HZ or 60HZ
- 4、Operating Temperature: -15℃ to 60℃
- 5、Flame resistance: UL94-V0
- 6、Certificates: CE、UL、ETL

## 二、FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3、Build diode ,no high voltage danger
- 4、Good linearity at very low current

## 三、DIMENSIONS( mm ):

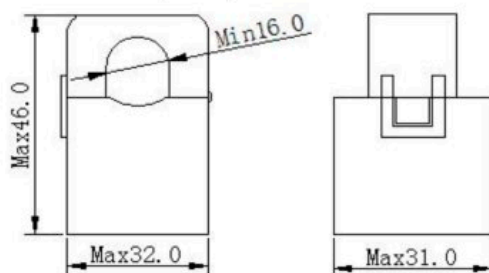

## 四、DIMENSIONS( mm ):

Model	Input (A)	Max current (A)	Output
XH-SCT-T16	0.2-100AAC	120AAC	mA/0.333VAC/0-5VAC

## 五、CURVE PERFORMANCE:

