PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR



Life Size

5.0 x 3.2 x 0.85mm

ASFLMB **Moisture Sensitivity Level – MSL 1** **RoHS/RoHS II Compliant**

FEATURES:

- Pure Silicon™ Clock Oscillator
- 2nd Generation MEMS Technology with reduced jitter by Discera
- Low Power Consumption <10mA
- Exceptional Stability +/- 10ppm Over Temp. at -40 to +105°C
- Compact QFN Plastic Packaging

APPLICATIONS:

- CCD Clock for VTR Camera
- Equipment Connected to PCs
- Low Profile Equipment
- Computers and Peripherals
- Lower Cost Crystal Oscillator Replacement
- Portable Electronics (MP3 Players, Games)
- Consumer Electronics such as TV's, DVR's, etc.
- Vibrant, Shock-Prone & Humid Environments for Industrial Equipment
- Demanding Military & Automotive Electronics

MEMS TECHNOLOGY

STANDARD SPECIFICATIONS:

Common Key Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range:	1.0		150	MHz	
Operating Temperature:	0		+70	°C	See options
Storage Temperature:	-55		+150	°C	
Overall Frequency Stability*:	-50		+50	ppm	See options
Supply Voltage (Vdd):	+1.8 ~ +3.3			V	
Output Load:			15, 25, or 40	pF	See options
	10			kΩ	
Symmetry:	45		55	%	@1/2Vdd
Startup Time:		1.5	3.0	ms	
Disable Time:		20	100	ns	
Disable Stand-by Current:			15	uA	
Tri-state Function (Stand-by) :	"1" (VIH≥0.75*Vdd) or Open: Oscillation "0" (VIL<0.25*Vdd) : Hi Z			V	
Aging:	-5.0	-----	+5.0	ppm	First year

Key Electrical Specifications V_{dd}= 1.8V

Parameters			Minimum	Typical	Maximum	Units	Notes
Supply Current (no load):	1.0 to 39.9999MHz			5	15	mA	CL=0p
	40.0 to 79.9999MHz			6	15	mA	RL=∞
	80.0 to 124.9999MHz			7	15	mA	T=25°C
	125.0 to 150MHz			8	15	mA	(Standard CL: 15pF)
	1.0 to 39.9999MHz			6	15	mA	CL=0p
	40.0 to 79.9999MHz			7	15	mA	RL=∞
	80.0 to 124.9999MHz			8	15	mA	T=25°C
	125.0 to 150MHz			9	15	mA	(CL option: 25pF)
	1.0 to 39.9999MHz			7	15	mA	CL=0p
	40.0 to 79.9999MHz			8	15	mA	RL=∞
	80.0 to 124.9999MHz			9	15	mA	T=25°C
	125.0 to 150MHz			10	15	mA	(CL option: 40pF)
Output Voltage:		V_{OH}	0.8*V_{dd}			V	
		V_{OL}			0.2*V_{dd}	V	CL=15, 25, 40pF
Rise Time: Fall Time:		Tr		1.8	3.0	ns	CL=15pF; T=25°C
		Tf		1.0	3.0	ns	20%/80%*VDD
		Tr		1.5	3.0	ns	CL=25pF; T=25°C
		Tf		1.2	3.0	ns	20%/80%*VDD
		Tr		1.4	3.0	ns	CL=40pF; T=25°C
		Tf		1.1	3.0	ns	20%/80%*VDD
Cycle to Cycle Jitter:				60		ps	F=100MHz
Period Jitter RMS:				10		ps	F=100MHz

2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 11.02.15**
Ph. 949.546.8000 | Fax. 949.546.8001
Visit www.abracon.com for Terms and Conditions of Sale

PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR



Life Size

5.0 x 3.2 x 0.85mm

ASFLMB

RoHS/RoHS II Compliant

Key Electrical Specifications – V_{dd}= 2.5V

Parameters			Minimum	Typical	Maximum	Units	Notes
Supply Current (no load):	1.0 to 39.9999MHz			6	15	mA	CL=0p RL=∞ T=25°C (Standard CL: 15pF)
	40.0 to 79.9999MHz			7	15	mA	
	80.0 to 124.9999MHz			8	15	mA	
	125.0 to 150MHz			9	15	mA	
	1.0 to 39.9999MHz			7	15	mA	CL=0p RL=∞ T=25°C (CL option: 25pF)
	40.0 to 79.9999MHz			8	15	mA	
	80.0 to 124.9999MHz			9	15	mA	
	125.0 to 150MHz			10	15	mA	
	1.0 to 39.9999MHz			8	16	mA	CL=0p RL=∞ T=25°C (CL option: 40pF)
	40.0 to 79.9999MHz			9	16	mA	
	80.0 to 124.9999MHz			10	16	mA	
	125.0 to 150MHz			11	16	mA	
Output Voltage:		V_{OH}	0.8*V_{dd}			V	
		V_{OL}			0.2*V_{dd}	V	CL=15, 25pF
		V_{OH}	0.9*V_{dd}			V	
		V_{OL}			0.1*V_{dd}	V	CL=40pF
Rise Time: Fall Time:		Tr		1.0	2.0	ns	CL=15pF; T=25°C 20%/80%*VDD
		Tf		0.9	2.0	ns	
		Tr		1.1	2.0	ns	CL=25pF; T=25°C 20%/80%*VDD
		Tf		0.9	2.0	ns	
		Tr		1.0	2.0	ns	CL=40pF; T=25°C 20%/80%*VDD
		Tf		0.9	2.0	ns	
Cycle to Cycle Jitter:				50		ps	F=100MHz
Period Jitter RMS:				5		ps	F=100MHz

2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 11.02.15**
Ph. 949.546.8000 | Fax. 949.546.8001
Visit www.abracon.com for Terms and Conditions of Sale

PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR



Life Size

5.0 x 3.2 x 0.85mm

ASFLMB

RoHS/RoHS II Compliant

Key Electrical Specifications –V_{dd}= 3.3V

Parameters			Minimum	Typical	Maximum	Units	Notes
Supply Current (no load):	1.0 to 39.9999MHz			7	15	mA	CL=0p RL=∞ T=25°C (Standard CL: 15pF)
	40.0 to 79.9999MHz			8	15	mA	
	80.0 to 124.9999MHz			9	15	mA	
	125.0 to 150MHz			10	15	mA	
	1.0 to 39.9999MHz			8	16	mA	CL=0p RL=∞ T=25°C (CL option: 25pF)
	40.0 to 79.9999MHz			9	16	mA	
	80.0 to 124.9999MHz			10	16	mA	
	125.0 to 150MHz			11	16	mA	
	1.0 to 39.9999MHz			8	16	mA	CL=0p RL=∞ T=25°C (CL option: 40pF)
	40.0 to 79.9999MHz			9	16	mA	
	80.0 to 124.9999MHz			10	16	mA	
	125.0 to 150MHz			11	16	mA	
Output Voltage:		V_{OH}	0.8*V_{dd}			V	
		V_{OL}			0.2*V_{dd}	V	CL=15pF
		V_{OH}	0.9*V_{dd}			V	
		V_{OL}			0.1*V_{dd}	V	CL=25, 40pF
Rise Time: Fall Time:		Tr		1.0	2.0	ns	CL=15pF; T=25°C 20%/80%*VDD
		Tf		0.9	2.0	ns	
		Tr		1.0	2.0	ns	CL=25pF; T=25°C 20%/80%*VDD
		Tf		0.9	2.0	ns	
		Tr		0.8	2.0	ns	CL=40pF; T=25°C 20%/80%*VDD
		Tf		0.8	2.0	ns	
Cycle to Cycle Jitter:				50		ps	F=100MHz
Period Jitter RMS:				5		ps	F=100MHz

Absolute Maximum Ratings

Item	Minimum	Maximum	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	Vdd+0.3	V	
Junction Temp.		+150	°C	
Storage Temp.	-55	+150	°C	
Soldering Temp.		+260	°C	40sec max
ESD HBM MM CDM		 4,000 200 1,500	V	

PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size

5.0 x 3.2 x 0.85mm

RoHS/RoHS II Compliant

OPTIONS AND PART IDENTIFICATION: (Left Blank if Standard)

Programmed Orders (Quantity > 1,000pcs)

ASFLMB - [ ] MHz - [ ][ ] - [ ] - [ ]

Frequency in MHz
e.g. 14.3181 MHz (Maximum 4 digits after decimal)

Operating Temp.
Blank: 0°C ~ +70°C
E: -20°C ~ +70°C
L: -40°C ~ +85°C
X: -40°C ~ +105°C

Overall Freq. Stability
C: ±50ppm (STD)
Y: ±10ppm
R: ±25 ppm

Output Load
Blank: 15pF
25: 25pF
40: 40pF

Packaging
Blank*: 72pcs / Tube
T: 1,000pcs / reel
T3: 3,000pcs / reel

* For Quick turn-around programmable orders < 1000pcs: Due to the immediate availability of stock and the qty of the order, the parts may be delivered as BULK: Cut Tape, Loose parts in Antistatic Bag or in Tube(s). The MOQ per the series will still apply for Tube packaging.

Un-Programmed Orders

Blank un-programmed oscillators and our low cost portable programmer are available for quick turn engineering requirements. Please call ABRACON or visit MEMSpeed Pro site http://www.abracon.com/memspeedpro/memspeedpro.html for more information.

ASFLMB - BLANK - [ ][ ] - [ ] - [ ]

Operating Temp.
Blank: 0°C ~ +70°C
E: -20°C ~ +70°C
L: -40°C ~ +85°C
X: -40°C ~ +105°C

Overall Freq. Stability
C: ±50ppm (STD)
Y: ±10ppm
R: ±25 ppm

Output Load
Blank: 15pF
25: 25pF
40: 40pF

Packaging
Blank: 72pcs / Tube
T: 1,000pcs / reel
T3: 3,000pcs / reel

PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB





Life Size

5.0 x 3.2 x 0.85mm

RoHS/RoHS II Compliant


OUTLINE DIMENSIONS:

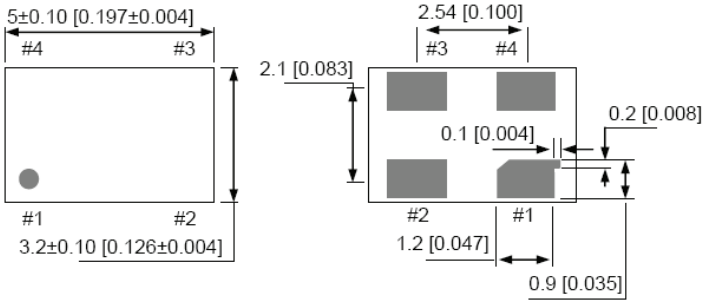



No.	Pin Terminal
1	Standby#
2	GND
3	Output
4	VDD


Recommended Land Pattern

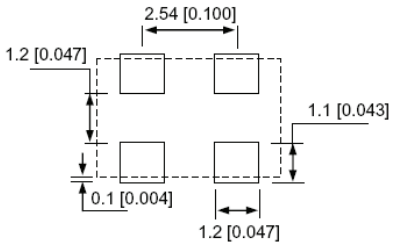

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

Dimensions: mm (inches)


REFLOW PROFILE:

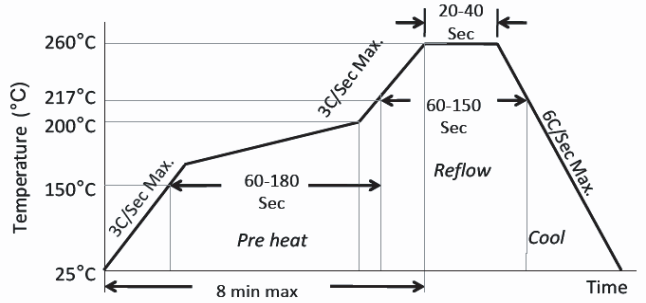



Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.
Preheat Time 150°C to 200°C	60-180 Sec
Time maintained above 217°C	60-150 Sec
Peak Temperature	255-260°C
Time within 5°C of actual Peak	20-40 Sec
Ramp-Down Rate	6°C/Sec Max.
Time 25°C to Peak Temperature	8 min Max.

TAPE AND REEL:


T= 1,000pcs/reel (D=180mm)
T3= 3,000pcs/reel (D=330mm)

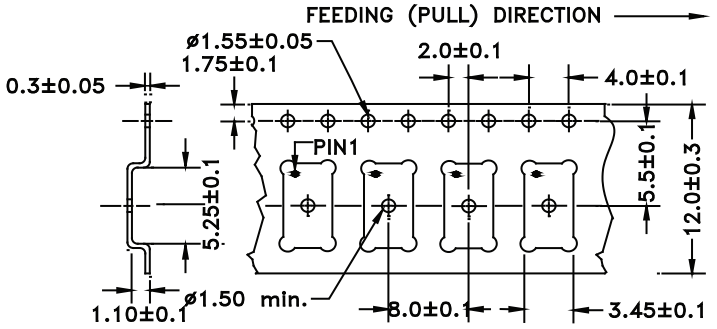


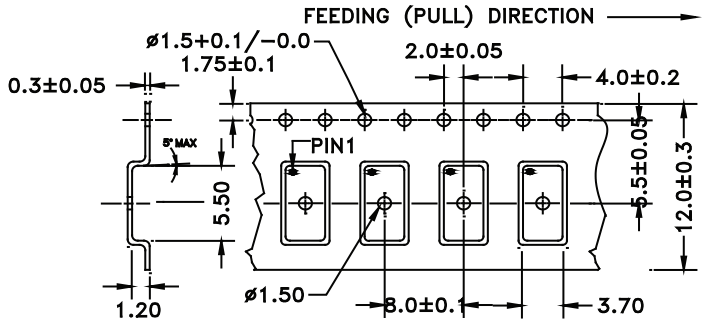

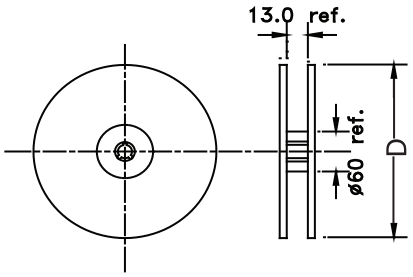

Tube: 72 pcs/tube

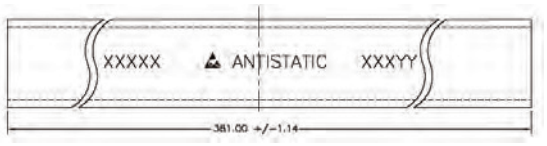



Unit orientation in tube:



Dimensions: mm



Need a test socket for the ASFLMB Series? To view compatible **PRECISION TEST SOCKETS** for these parts, **click here: PN: AXS-5032-04-07.**

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where componentfailure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

ASFLMB-BLANK-XY ASFLMB-BLANK-LY ASFLMB-BLANK-EY ASFLMB-BLANK-XR ASFLMB-BLANK-LR ASFLMB-BLANK-ER ASFLMB-BLANK-E ASFLMB-BLANK-L ASFLMB-BLANK-X ASFLMB-1.544MHZ-LR-T ASFLMB-1.8432MHZ-LR-T ASFLMB-10.000MHZ-LR-T ASFLMB-100.000MHZ-LR-T ASFLMB-106.250MHZ-LY-T ASFLMB-11.0592MHZ-LR-T ASFLMB-12.000MHZ-LR-T ASFLMB-12.288MHZ-LR-T ASFLMB-125.000MHZ-LY-T ASFLMB-133.333MHZ-LY-T ASFLMB-14.31818MHZ-LR-T ASFLMB-14.7456MHZ-LR-T ASFLMB-150.000MHZ-LY-T ASFLMB-16.000MHZ-LR-T ASFLMB-16.384MHZ-LR-T ASFLMB-18.432MHZ-LR-T ASFLMB-20.000MHZ-LR-T ASFLMB-24.000MHZ-LR-T ASFLMB-24.576MHZ-LR-T ASFLMB-25.000MHZ-LR-T ASFLMB-27.000MHZ-LR-T ASFLMB-29.4912MHZ-LR-T ASFLMB-3.6864MHZ-LR-T ASFLMB-30.000MHZ-LR-T ASFLMB-32.000MHZ-LR-T ASFLMB-33.000MHZ-LR-T ASFLMB-33.333MHZ-LR-T ASFLMB-4.000MHZ-LR-T ASFLMB-40.000MHZ-LR-T ASFLMB-44.000MHZ-LR-T ASFLMB-48.000MHZ-LR-T ASFLMB-50.000MHZ-LR-T ASFLMB-6.000MHZ-LR-T ASFLMB-60.000MHZ-LR-T ASFLMB-7.3728MHZ-LR-T ASFLMB-75.000MHZ-LR-T ASFLMB-8.000MHZ-LR-T ASFLMB-80.000MHZ-LR-T ASFLMB-1.8432MHZ-LY-T ASFLMB-1.8432MHZ-XY-T ASFLMB-10.000MHZ-LY-T ASFLMB-10.000MHZ-XY-T ASFLMB-100.000MHZ-LY-T ASFLMB-100.000MHZ-XY-T ASFLMB-106.250MHZ-XY-T ASFLMB-11.0592MHZ-LY-T ASFLMB-11.0592MHZ-XY-T ASFLMB-12.000MHZ-LY-T ASFLMB-12.000MHZ-XY-T ASFLMB-120.000MHZ-LY-T ASFLMB-120.000MHZ-XY-T ASFLMB-125.000MHZ-XY-T ASFLMB-133.333MHZ-XY-T ASFLMB-14.31818MHZ-LY-T ASFLMB-14.31818MHZ-XY-T ASFLMB-14.7456MHZ-LY-T ASFLMB-14.7456MHZ-XY-T ASFLMB-150.000MHZ-XY-T ASFLMB-16.000MHZ-LY-T ASFLMB-16.000MHZ-XY-T ASFLMB-18.432MHZ-LY-T ASFLMB-18.432MHZ-XY-T ASFLMB-20.000MHZ-LY-T ASFLMB-20.000MHZ-XY-T ASFLMB-24.000MHZ-LY-T ASFLMB-24.000MHZ-XY-T ASFLMB-24.576MHZ-LY-T ASFLMB-24.576MHZ-XY-T ASFLMB-25.000MHZ-LY-T ASFLMB-25.000MHZ-XY-T ASFLMB-27.000MHZ-LY-T ASFLMB-27.000MHZ-XY-T ASFLMB-3.6864MHZ-LY-T ASFLMB-3.6864MHZ-XY-T ASFLMB-30.000MHZ-LY-T ASFLMB-30.000MHZ-XY-T ASFLMB-32.000MHZ-LY-T ASFLMB-32.000MHZ-XY-T ASFLMB-33.000MHZ-LY-T ASFLMB-33.000MHZ-XY-T ASFLMB-33.333MHZ-LY-T ASFLMB-33.333MHZ-XY-T ASFLMB-4.000MHZ-LY-T ASFLMB-4.000MHZ-XY-T ASFLMB-40.000MHZ-LY-T ASFLMB-40.000MHZ-XY-T ASFLMB-48.000MHZ-LY-T ASFLMB-48.000MHZ-XY-T ASFLMB-50.000MHZ-LY-T ASFLMB-50.000MHZ-XY-T ASFLMB-66.000MHZ-LY-T