

PQ15RW11**Low Power-Loss Voltage Regulator**

Variable Output, General Purpose Type Low Power-Loss Voltage Regulator

General Description

Sharp's **PQ15RW11** is 3.0 to 15V / 1A output type low power-loss voltage regulator(TO-220). It contributes to energy and space saving of various electronic equipment such as AV, OA equipment.

Features



- (1) Low power-loss
(Dropout voltage: MAX. 0.5V at $I_o=0.5A$)
- (2) Variable output voltage(Setting range: 3.0 to 15V)
- (3) Compact resin full-mold package(equivalent to TO-220)
- (4) Low voltage operation(Minimum supply voltage: 3.5V)
- (5) Reference voltage precision: $\pm 2.5\%$
- (6) Overcurrent, overheat protection functions
- (7) Lead forming type is also available.(**PQ15RW1B**)

Applications

- (1) Power supplies for various electronic equipment such as AV or OA.

Outline Dimensions

(Unit:mm)

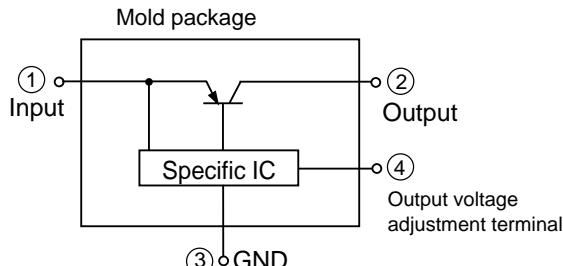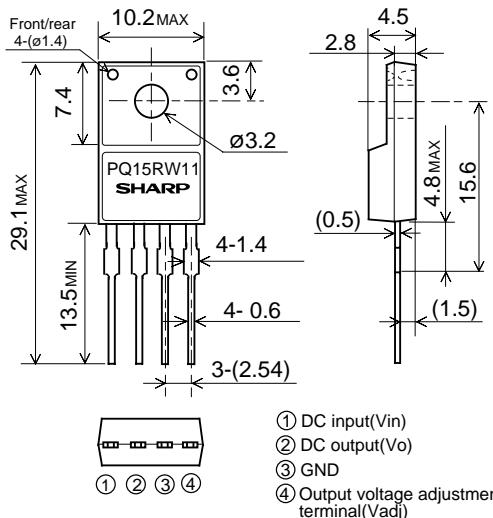

(Notice)

- In the absence of device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
- Specifications are subject to change without notice for improvement.

(Internet)

- Data for Sharp's optoelectronic/power devices is provided for internet. (Address <http://www.sharp.co.jp/ecg/>)

SHARP**PQ15RW11****Low Power-Loss Voltage Regulator****■ Absolute Maximum Ratings**

(Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|---------------------------------------|------------------|--------------|------|
| *1 Input voltage | V _{in} | 20 | V |
| *1 Output adjustment terminal voltage | V _{adj} | 5 | V |
| Output current | I _o | 1 | A |
| *2 Power dissipation | P _{d1} | 1.4 | W |
| | P _{d2} | 15 | W |
| *3 Junction temperature | T _j | 150 | °C |
| Operating temperature | T _{opr} | -20 to +80 | °C |
| Storage temperature | T _{stg} | -40 to +150 | °C |
| Soldering temperature | T _{sol} | 260(For 10s) | °C |

*1 All are open except GND and applicable terminals.

*2 Pd1: No heat sink, Pd2: With infinite heat sink

*3 Overheat protection may operate at 125<=T_j<=150°C.**■ Electrical Characteristics**

(Unless otherwise specified, conditions shall be Vin=5V, Vo=3.3V(R1=2kΩ, R2=500Ω), Io=0.5A)(Ta=25°C)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|----------------------------------|----------------------------|-------|-------|-------|------|
| Input voltage | V _{in} | — | 3.5 | — | 20 | V |
| Output voltage | V _o | — | 3.0 | — | 15 | V |
| Load regulation | RegL | Io=5mA to 1A | — | 0.3 | 2 | % |
| Line regulation | RegI | Vin=5 to 15V, Io=5mA | — | 0.5 | 2.5 | % |
| Ripple rejection | RR | — | 45 | 55 | — | dB |
| Reference voltage | V _{ref} | — | 2.574 | 2.64 | 2.706 | V |
| Temperature coefficient of reference voltage | T _c /V _{ref} | T _j =0 to 125°C | — | ±0.01 | — | %/°C |
| Dropout voltage | V _{i-o} | Vin=3.5V, Io=0.5A | — | — | 0.5 | V |
| Quiescent current | I _q | Io=0A | — | — | 8 | mA |

As of March 1996

Tec.PW960302