# Transistors 2SB564A




#### AUDIO FREQUENCY POWER AMPLIFIER

- Collector Current Ic = -1A
- Collector Dissipation Pc = 800mW

### ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Symbol	Rating	Unit
V <sub>CBO</sub>	- 30	v
VCEO	- 25	v
VEBO	-5	v
	- 1.0	Α
Pc	800	mW
Ti	150	°C
Tstg	-55~150	°Ć
	V <sub>СВО</sub> V <sub>СЕО</sub> V <sub>ЕВО</sub> Ic Pc Tj	V <sub>CBO</sub> -30   V <sub>CEO</sub> -25   V <sub>EBO</sub> -5   Ic -1.0   Pc 800   Tj 150

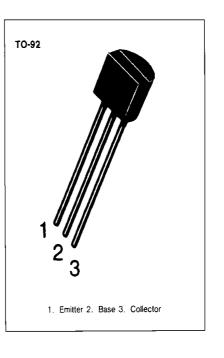

## ELECTRICAL CHARACTERISTICS (Ta=25°C)


Characteristic	Symbol	Test Conditions	Min	Тур	Max	Unit
Collector-Base Breakdown Voltage	ВV <sub>сво</sub>	$l_{\rm C} = -100 \mu {\rm A}, \ l_{\rm E} = 0$	- 30			v
Collector-Emitter Breakdown Voltage	BVCEO	$I_{\rm C} = -10 {\rm mA}, \ I_{\rm B} = 0$	- 25			V
Emitter-Base Breakdown Voltage	BVEBO	$I_{\rm E} = -100 \mu A$ , $I_{\rm C} = 0$	- 5		1	v
Collector Cut-off Current	Ісво	$V_{CB} = -30V, I_E = 0$			- 0.1	μA
DC Current Gain	hre	$V_{CE} = -1V$ , $I_{C} = -100 \text{mA}$	70		400	
Collector-Emitter Saturation Voltage	V <sub>CE</sub> (sat)	$I_{\rm C} = -1A$ , $I_{\rm B} = -0.1A$			-0.5	V
Base-Emitter Saturation Voltage	V <sub>BE</sub> (sat)	$I_{\rm C} = -1A$ , $I_{\rm B} = -0.1A$			- 1.2	v
Current-Gain-Bandwidth Product	fT	$V_{CE} = -6V$ , $I_{C} = -10mA$		110		MHz
Output Capacitance	Cob	$V_{CB} = -6V$ , f=1 MHz, $I_E = 0$		18		pF

#### **h**FE CLASSIFICATION

Classification	0	Y	G
h <sub>FE</sub>	70-140	120-240	200-400



STATIC CHARACTERISTIC

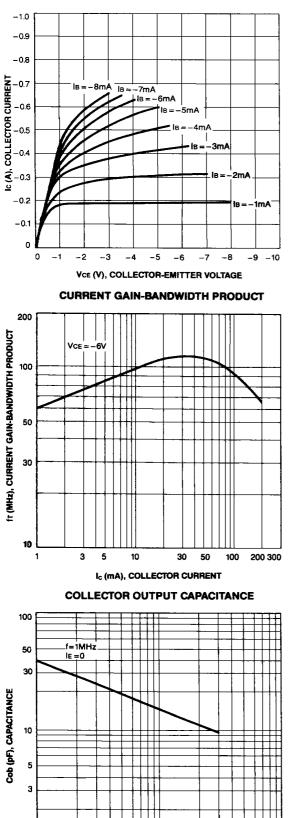

-1

-3 -5


-10

VCB (V), COLLECTOR-BASE VOLTAGE

-30 -50

-- 100

DC CURRENT GAIN

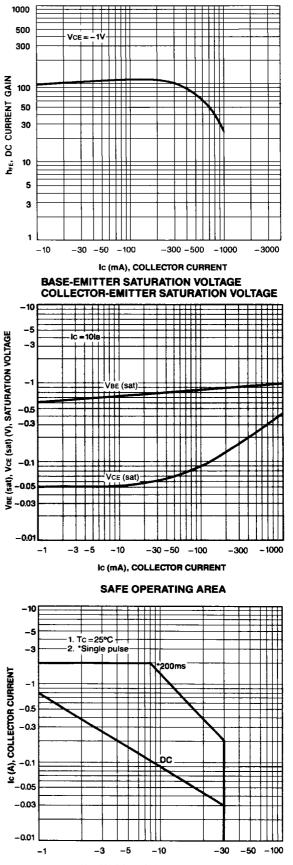

VCE (V), COLLECTOR-EMITTER VOLTAGE

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.