

### Inductors for standard circuits

Multilayer ferrite

**MLF** series

# MLF1608 type

**MLF1608** 

1608 [0603 inch]\*

\* Dimensions Code JIS[EIA]



#### REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

#### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

<u>↑</u> REMINDERS				
<ul> <li>The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RF or less).</li> </ul>				
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.				
On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).				
<ul> <li>Before soldering, be sure to preheat components.</li> <li>The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.</li> </ul>				
<ul> <li>Soldering corrections after mounting should be within the range of the conditions determined in the specifications.</li> <li>If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.</li> </ul>				
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.				
<ul> <li>Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.</li> </ul>				
Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  A malfunction may occur due to magnetic interference.				
Use a wrist band to discharge static electricity in your body through the grounding wire.				
On not expose the products to magnets or magnetic fields.				
On not use for a purpose outside of the contents regulated in the delivery specifications.				
The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.				
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.				
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions				

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment

set forth in the each catalog, please contact us.

- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.



# **Inductors for standard circuits Multilayer ferrite**

Product compatible with RoHS directive
Halogen-free
Compatible with lead-free solders

# Overview of MLF1608 type


#### FEATURES

- The lineup includes a wide inductance range.
- O Highly reliable monolithic structure with multilayer integration.

#### APPLICATION

Smart phones, tablet terminals, tuners, LCD-TVs, PDP-TVs, audio equipment, computers, signal processing for modules etc.

#### ■ PART NUMBER CONSTRUCTION

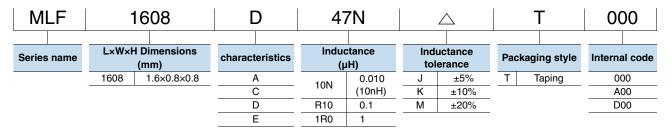

#### ■ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

	Temperature range*			Individual weight
Type	Operating	Storage		
Турс	temperature	temperature**		
	(°C)	(°C)	(pieces/reel)	(mg)
MLF1608	-55 to +125	-55 to +125	4,000	4

<sup>\*</sup> In case the product's inductance is 15µH or higher, both Operating and Storage temperature ranges are -40 to +85°C.


<sup>\*\*</sup> The Storage temperature range is for after the circuit board is mounted.

RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.



#### ■ RECOMMENDED REFLOW PROFILE

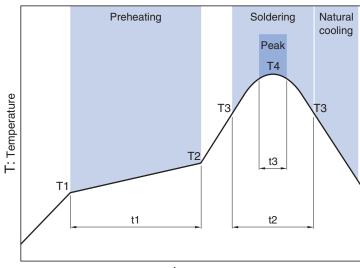


t: Time

Preheati	ng		Solderin	g	Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	30 to 60s	250 to 260°C	10s max.



#### **SHAPE & DIMENSIONS**



Dimensions in mm



#### ■ RECOMMENDED LAND PATTERN



Dimensions in mm



#### **■ ELECTRICAL CHARACTERISTICS**

#### **CHARACTERISTICS SPECIFICATION TABLE**

L		Q		L, Q measur conditions	ring	Self-resona frequency	ant	DC resis	tance	Rated current	Part No.*
				Frequency	Current						
(μH)	Tolerance	min.	typ.	(MHz)	(mA)	(MHz)min.	(MHz)typ.	( $\Omega$ )max.	( $\Omega$ )typ.	(mA)max.	
0.047	±20%	10	20	50	1.0	600	900	0.20	0.10	200	MLF1608D47N△T□□□
0.068	±20%	10	20	50	1.0	550	700	0.30	0.15	200	MLF1608D68N△T□□□
0.082	±20%	10	20	50	1.0	500	650	0.30	0.15	200	MLF1608D82N△T□□□
0.10	±5%±10%±20%	15	25	25	1.0	450	600	0.35	0.20	200	MLF1608DR10 △ T □□□
0.12	±5%±10%±20%	15	25	25	1.0	400	550	0.40	0.20	200	MLF1608DR12 △ T □□□
0.15	±5%±10%±20%	15	25	25	1.0	350	500	0.45	0.25	200	MLF1608DR15 △ T □□□
0.18	±5%±10%±20%	15	25	25	1.0	320	450	0.50	0.25	150	MLF1608DR18 △ T □□□
0.22	±5%±10%±20%	15	25	25	1.0	290	400	0.55	0.30	150	MLF1608DR22 △ T □□□
0.27	±5%±10%±20%	15	25	25	1.0	260	350	0.60	0.35	150	MLF1608DR27 △ T □□□
0.33	±5%±10%±20%	15	25	25	1.0	230	320	0.75	0.40	100	MLF1608DR33 △ T □□□
0.39	±5%±10%±20%	15	25	25	1.0	210	290	0.85	0.45	100	MLF1608DR39 △ T □□□
0.47	±5%±10%±20%	15	30	25	1.0	190	260	0.95	0.50	100	MLF1608DR47 △ T □□□
0.56	±5%±10%±20%	15	30	25	1.0	170	230	1.05	0.55	100	MLF1608DR56 △ T □□□
0.68	±5%±10%±20%	15	30	25	1.0	150	210	1.25	0.65	70	MLF1608DR68 △ T □□□
0.82	±5%±10%±20%	15	30	25	1.0	130	190	1.40	0.75	70	MLF1608DR82 △ T □□□
1.0	±5%±10%±20%	35	50	10	1.0	120	170	0.50	0.25	50	MLF1608A1R0 △ T □□□
1.2	±5%±10%±20%	35	50	10	1.0	110	150	0.65	0.25	50	MLF1608A1R2 △ T □□□
1.5	±5%±10%±20%	35	55	10	1.0	100	140	0.70	0.30	50	MLF1608A1R5 △ T □□□
1.8	±5%±10%±20%	35	55	10	1.0	90	130	0.85	0.35	50	MLF1608A1R8 △ T □□□
2.2	±5%±10%±20%	35	55	10	1.0	80	120	1.00	0.45	30	MLF1608A2R2 △ T □□□
2.7	±5%±10%±20%	35	55	10	1.0	70	110	1.15	0.50	30	MLF1608A2R7 △ T □□□
3.3	±5%±10%±20%	35	60	10	1.0	65	100	1.30	0.55	30	MLF1608A3R3 △ T □□□
3.9	±5%±10%±20%	35	60	10	1.0	60	90	1.45	0.65	30	MLF1608A3R9 △ T □□□
4.7	±5%±10%±20%	35	60	10	1.0	55	80	1.60	0.75	30	MLF1608A4R7 △ T □□□
5.6	±5%±10%±20%	35	60	4	0.1	45	70	1.10	0.55	15	MLF1608E5R6 △ T □□□
6.8	±5%±10%±20%	35	60	4	0.1	40	60	1.30	0.65	15	MLF1608E6R8 △ T □□□
8.2	±5%±10%±20%	35	60	4	0.1	35	55	1.50	0.80	10	MLF1608E8R2 △ T □□□
10	±5%±10%±20%	30	55	2	0.1	30	50	1.70	1.00	10	MLF1608E100 △ T □□□
12	±5%±10%±20%	30	55	2	0.1	25	45	1.80	1.20	10	MLF1608E120 △ T □□□
15	±10%±20%	20	40	1	0.1	22	42	1.50	0.80	2	MLF1608C150 △ T □□□
18	±10%±20%	20	40	1	0.1	20	40	1.60	0.85	2	MLF1608C180 △ T □□□
22	±10%±20%	20	40	1	0.1	18	38	1.70	0.90	2	MLF1608C220 △ T □□□
27	±10%±20%	20	40	1	0.1	15	35	1.80	1.20	2	MLF1608C270 △ T □□□
33	±10%±20%	20	40	1	0.1	10	30	2.20	1.40	2	MLF1608C330 △ T □□□

<sup>\*</sup> The "  $\triangle$  " of the Part Number contains the inductance tolerance code, J ( $\pm 5\%$ ), K ( $\pm 10\%$ ), or M ( $\pm 20\%$ ).

#### O Measurement equipment

·		
Measurement item	Product No.	Manufacturer
L, Q	4294A+16034G	Keysight Technologies
Self-resonant frequency	E4991A	Keysight Technologies
DC resistance	Type-7561	Yokogawa

<sup>\*</sup> Equivalent measurement equipment may be used.

<sup>\*</sup> The "  $\square$  " of the Part Number contains the internal code (000, A00, or D00), following below.

<sup>•</sup> In case the inductance tolerance code is J: 000


<sup>•</sup> In case the inductance tolerance code is M or K (L = 0.047 to 8.2 $\mu$ H or 15 to 22 $\mu$ H): A00


<sup>•</sup> In case the inductance tolerance code is M or K (L = 10,12,27,33 $\mu$ ): D00



#### **■ ELECTRICAL CHARACTERISTICS**

#### L FREQUENCY CHARACTERISTICS GRAPH

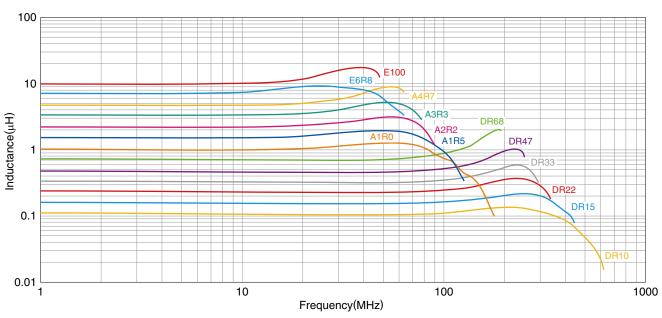

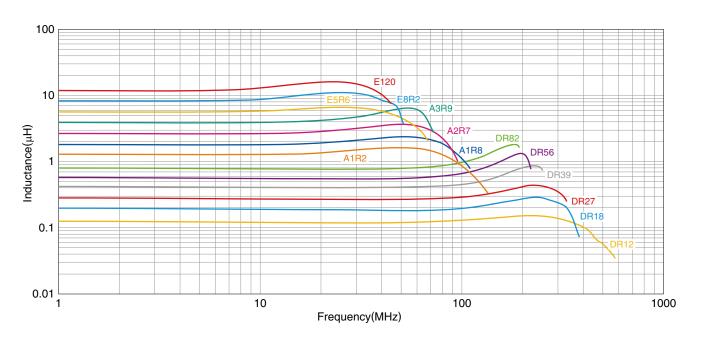

#### $\bigcirc \ \text{Measurement equipment}$


Product No.	Manufacturer
E4991A+16192A	Keysight Technologies

<sup>\*</sup> Equivalent measurement equipment may be used.



#### **ELECTRICAL CHARACTERISTICS**

#### ☐ L FREQUENCY CHARACTERISTICS GRAPH

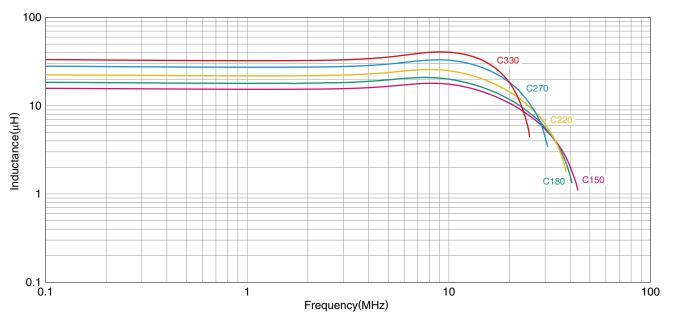

 $\bigcirc \ {\bf Measurement\ equipment}$ 


Product No.	Manufacturer
4294A+16034G	Keysight Technologies


<sup>\*</sup> Equivalent measurement equipment may be used.



#### **■ ELECTRICAL CHARACTERISTICS**

#### **□ Q FREQUENCY CHARACTERISTICS GRAPH**

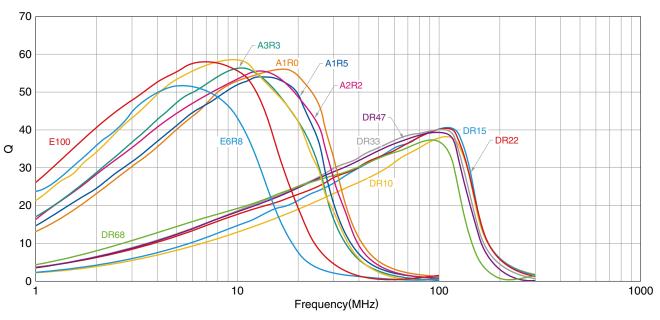

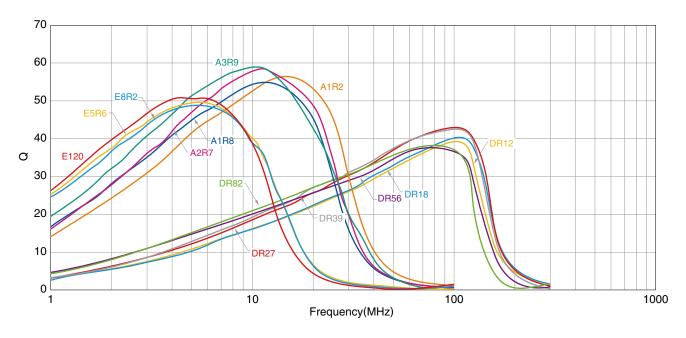

#### $\bigcirc \ \text{Measurement equipment}$


Product No.	Manufacturer
E4991A+16192A	Keysight Technologies

<sup>\*</sup> Equivalent measurement equipment may be used.



#### **ELECTRICAL CHARACTERISTICS**

#### **□Q FREQUENCY CHARACTERISTICS GRAPH**

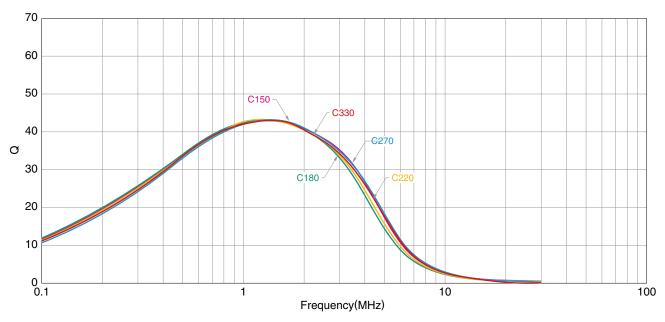

O Measurement equipment


Product No.	Manufacturer
4294A+16034G	Keysight Technologies

<sup>\*</sup> Equivalent measurement equipment may be used.




#### **■PACKAGING STYLE**


#### REEL DIMENSIONS



#### **TAPE DIMENSIONS**

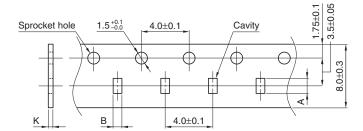

Type	Α	В	K
MLF1608	1.9±0.2	1.1±0.2	1.1 max.



Dimensions in mm

#### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

#### TDK:

```
MLF1608A1R0J MLF1608A1R2J MLF1608A1R2K MLF1608A1R5J MLF1608A1R5K MLF1608A1R8J
MLF1608A1R8K MLF1608A2R2J MLF1608A2R2K MLF1608A2R7J MLF1608A2R7K MLF1608A3R3J
MLF1608A3R3K MLF1608A3R9J MLF1608A3R9K MLF1608A4R7J MLF1608A4R7K MLF1608C150K
MLF1608C180K MLF1608C220K MLF1608C270K MLF1608C330K MLF1608D47NM MLF1608D68NM
MLF1608D82NM MLF1608DR10J MLF1608DR10K MLF1608DR12J MLF1608DR12K MLF1608DR15J
MLF1608DR15K MLF1608DR18J MLF1608DR18K MLF1608DR22J MLF1608DR22K MLF1608DR27J
MLF1608DR27K MLF1608DR33J MLF1608DR33K MLF1608DR39J MLF1608DR39K MLF1608DR47J
MLF1608DR47K MLF1608DR56J MLF1608DR56K MLF1608DR68J MLF1608DR68K MLF1608DR82J
MLF1608E100J MLF1608E100K MLF1608E120J MLF1608E120K MLF1608E5R6J MLF1608E5R6K
MLF1608E6R8J MLF1608E6R8K MLF1608E6R8M MLF1608E8R2J MLF1608E8R2K MLF1608DR82K
MLF1608A1R0M MLF1608A1R2M MLF1608A1R5M MLF1608A1R8M MLF1608A2R2M MLF1608A2R7M
MLF1608A3R3M MLF1608A3R9M MLF1608A4R7M MLF1608C150M MLF1608C180M MLF1608C220M
MLF1608C270M MLF1608C330M MLF1608DR10M MLF1608DR12M MLF1608DR15M MLF1608DR18M
MLF1608DR22M MLF1608DR27M MLF1608DR33M MLF1608DR39M MLF1608DR47M MLF1608DR56M
MLF1608DR68M MLF1608DR82M MLF1608E100M MLF1608E120M MLF1608E5R6M MLF1608E8R2M
MLF1608A1R0K MLF1608C270KT MLF1608A3R3JTD25 MLF1608A2R2JTD25 MLF1608DR27JTD25
MLF1608DR47JTD25 MLF1608A3R9JTD25 MLF1608A2R7JTD25 MLF1608A4R7JTD25 MLF1608DR82JTD25
```