# CHIP EMIFIL®CHIP 3-TERMINAL CAPACITOR FOR LARGE CURRENT FOR GENERAL NFM18PC Series Reference Sheet


# 1.Scope

This product specification is applied to Chip EMIFIL®Chip 3-terminal Capacitor for Large Current used for General Electronic equipment.


# 2.Reference PART No. List

	Customer PART NO.	MURATA PART NO.
1		NFM18PC104R1C3D
2		NFM18PC105R0J3D
3		NFM18PC224R0J3D
4		NFM18PC225B0J3D
5		NFM18PC225B1A3D
6		NFM18PC474R0J3D

## 3.MURATA Part NO. System



# 4. Type & Dimensions

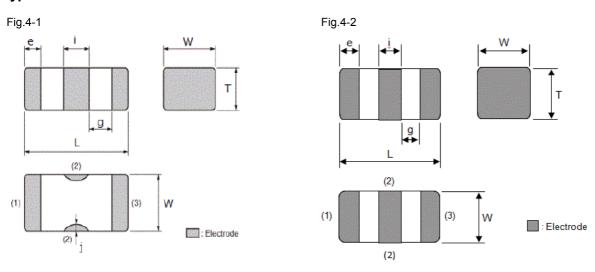


							(Unit:mm)
	MURATA PART NO.	(1)-1 L	(1)-2 W	1	Γ	е	g
	WIORATA PART NO.	i	j	Type No			
1	NFM18PC104R1C3D	1.6±0.1	0.8±0.1	0.6	±0.1	0.25±0.1	0.2 min.
		0.4±0.1	0.2±0.1	4-1			
2	NFM18PC105R0J3D	1.6±0.1	0.8±0.1	0.8	±0.1	0.25±0.1	0.2 min.
2	NEW IOPO IOSKOJSD	0.4±0.1	-	4-2		•	
2	NFM18PC224R0J3D	1.6±0.1	0.8±0.1	0.6±	±0.1	0.25±0.1	0.2 min.
3	NCM 1000224R0J3D	0.4±0.1	0.2±0.1	4-1			
4	NFM18PC225B0J3D	1.6±0.1	0.8±0.1	0.6±	±0.1	0.25±0.1	0.2 min.
4	INFWITOPC225BUJSD	0.4±0.1	0.2±0.1	4-1		•	
5	NFM18PC225B1A3D	1.6±0.1	0.8±0.1	0.8±	±0.1	0.25±0.1	0.2 min.
3	NFM18PC225B1A3D	0.4±0.1	-	4-2			
6	NEM49DC474D0 I2D	1.6±0.1	0.8±0.1	0.6±	±0.1	0.25±0.1	0.2 min.
О	NFM18PC474R0J3D	0.4±0.1	0.2±0.1	4-1			

# muRata

No.JEMCP0-010861C

a)Equivalent Circuit



## 5.Rated value

	MURATA PART NO.	(3) Nominal Capacitance	Capacitance Tolerance	(5) Rated Voltage	Rated Current (mA)	DC Resistance	Insulation Resistance	Specifications and Test Methods No. (Operating / Storage Temp. Range)
1	NFM18PC104R1C3D	0.1 uF	±20 %	DC 16 V	2A(DC)	0.03Ωmax.	1000MΩmin.	7.1 (-55 to 125 °C / -55 to 125 °C)
2	NFM18PC105R0J3D	1 uF	±20 %	DC 6.3 V	4A(DC)	0.01Ωmax.	500MΩmin.	7.1 (-55 to 105 °C / -55 to 105 °C)
3	NFM18PC224R0J3D	0.22 uF	±20 %	DC 6.3 V	2A(DC)	0.03Ωmax.	1000MΩmin.	7.1 (-55 to 125 °C / -55 to 125 °C)
4	NFM18PC225B0J3D	2.2 uF	±20 %	DC 6.3 V	2A(DC)	0.02Ωmax.	200MΩmin.	7.1 (-40 to 85 °C / -40 to 85 °C)
5	NFM18PC225B1A3D	2.2 uF	±20 %	DC 10 V	4A(DC)	0.01Ωmax.	200MΩmin.	7.1 (-40 to 85 °C / -40 to 85 °C)
6	NFM18PC474R0J3D	0.47 uF	±20 %	DC 6.3 V	2A(DC)	0.03Ωmax.	1000MΩmin.	7.1 (-55 to 125 °C / -55 to 125 °C)

6.Package

•	uonugo					
	MURATA PART NO.	(7) Packaging	Packaging Unit			
1	NFM18PC104R1C3D	φ180mm Reel PAPER	4000 pcs./Reel			
2	NFM18PC105R0J3D	φ180mm Reel PAPER	4000 pcs./Reel			
3	NFM18PC224R0J3D	φ180mm Reel PAPER	4000 pcs./Reel			
4	NFM18PC225B0J3D	φ180mm Reel PAPER	4000 pcs./Reel			
5	NFM18PC225B1A3D	φ180mm Reel PAPER	4000 pcs./Reel			
6	NFM18PC474R0J3D	φ180mm Reel PAPER	4000 pcs./Reel			

Product specifications in this catalog are as of Apr.1,2015,and are subject to change or obsolescence without notice. Please consult the approval sheet before ordering. Please read rating and !Cautions first.

7.

# SPECIFICATIONS AND TEST METHODS

#### **Electrical Performance**

No	Item	Specification	Test Method
1	Capacitance	Meet item 5.	Frequency: 1.0±0.1kHz
	(Cap.)		Voltage :
			Only NFM18PC225B0J3 : 0.5±0.1V(rms)
			Except above : 1±0.2V(rms)
2	Insulation		Voltage : Rated Voltage
	Resistance(I.R.)		Time : 2 minutes max.
3	DC Resistance		Measured with 100mA max.
4	Withstanding Voltage	Products shall not be damaged.	Test Voltage : Rated Voltage x 300%
			Time: 1 to 5 s
			Charge Current : 50 mA max.
5	Operating Temperature	Shown in item 5.	Includes self-heating
6	Storage Temperature		

#### Standard Testing Condition

< Unless otherwise specified >

Temperature : Ordinary Temp. / 15  $^{\circ}\text{C}$  to 35  $^{\circ}\text{C}$  Humidity: Ordinary Humidity / 25 %(RH) to 85 %(RH)

< In case of doubt > Temperature: 20 °C  $\pm$  2 °C Humidity: 60 %(RH) to 70 %(RH)

Atmospheric pressure: 86 kPa to 106 kPa

7.

■SPECIFICATIONS AND TEST METHODS

#### Mechanical Performance

No	Item	Specification	Test Method	
_	Appearance and	Meet item 4.	Visual Inspection and measured with Slide Calipers.	
	Dimensions			
2	Solderability	Electrodes shall be at least 90% covered with new solder coating.	Flux: Ethanol solution of rosin, 25(wt)% Pre-heat: 150±10°C, 60 to 90s Solder: Sn-3.0Ag-0.5Cu Solder Temperature: 240 ± 3°C Immersion Time: 3±1 s Immersion and emersion rates: 25mm / s	
3	Resistance to soldering heat	Meet Table 1.  Table 1  Appearance No damaged Cap. Change Within ±7.5% I.R. Meet the initial rated value.  DC Resistance 0.05Ω max.	Flux: Ethanol solution of rosin, 25(wt)% Pre-heat: 150±10°C, 60 to 90s Solder: Sn-3.0Ag-0.5Cu Solder Temperature: 270 ± 5°C Immersion Time: 10 ± 1 s Immersion and emersion rates: 25mm / s Initial values: measured after heat treatment (150+0 / -10 °C,1hour) and exposure in the room condition for 48±4 hours. Then measured after exposure in the room condition for 48±4 hours.	
4	Bending Strength	Meet Table 2.  Table 2  Appearance No damaged Cap. Change Within ±7.5%  DC Resistance 0.05Ω max.	It shall be soldered on the glass-epoxy substrate (100 × 40 × 1.0mm).  Deflection : 2 mm  Keeping Time : 30 s  Pressure jig  R340 F  Deflection  (in mm)	
5	Drop	Products shall be no failure after tested.	It shall be dropped on concrete or steel board.  Height: 1m  Method: Free fall  Attitude from which the product is dropped: 3 directions  The Number of Time: 3 times for each direction  (Total 9 times)	
6	Bonding Strength	The electrodes shall be no failure after tested.	It shall be soldered on the glass-epoxy substrate.  Applying Force (F): 9.8 N  Applying Time: 10 s  0.5  0.6  (in mm)	
7	Vibration	Meet Table 3.  Table 3  Appearance No damaged Capacitance Meet the initial rated value.  DC Resistance 0.05Ω max.	It shall be soldered on the glass-epoxy substrate. Oscillation Frequency: 10 to 2000 to 10Hz for 20 minute. Total amplitude 1.5 mm or Acceleration amplitude 196m/s2 whichever is smaller. Time: A period of 2 hours in each of 3 mutually perpendicular directions. (Total 6 hours) Preconditioning: Heat treatment (150+0 / -10 °C,1hour)	

7.


# SPECIFICATIONS AND TEST METHODS

#### **Environment Performance**

It shall be soldered on the glass-epoxy substrate.

	It shall be soldered on the glass-epoxy substrate.							
No		Specification		Test Method				
1	Temperature Cycling	Meet Table 1.		1 Cycle  1 step: -55+0 / -3°C / 30+3 / -0 min  2 step: Room Temperature / within 3 min  3 step: Maximum Operating Temperature  +3 / -0°C / 30 +3 / -0 min  4 step: Room Temperature / within 3 min  Total of 10 cycles  Initial values: measured after heat treatment(150+0 / -10°C  ,1hour) and exposure in the room condition for 48±4 hours.  Then measured after exposure in the room condition for 48±4 hours.  If it's doubt, the mesuring has to be done after 1 hours curing at 150+0 / -10°C and 48±4 hours storage.				
2	Humidity	Meet Table 4. Table 4 Appearance Cap.Change I.R.	No damaged           Within $\pm 12.5\%$ 0.1uF         500MΩ min.           0.22uF         225MΩ min.           0.47uF         105MΩ min.           1uF         50MΩ min.           2.2uF         23MΩ min.	Temperature: 40±2°C Humidity: 90 to 95%(RH) Time: 500+24 / -0 hours Initial values: measured after heat treatment (150+0 / -10°C, 1hour) and exposure in the room condition for 48±4 hours. Then measured after exposure in the room condition for 48±4 hours. If it's doubt, the mesuring has to be done after 1 hours curing at 150+0 / -10°C and 48±4 hours storage.				
3	Heat Life	DC Resistance	0.05Ω max.	Temperature : : Maximum Operating Temperature ± 2 °C Test Voltage : Rated Voltage x 200% Charge Current : 50 mA max. Time : 1000+48 / -0 hours Initial values: measured after heat treatment (150+0 / -10°C, 1hour) and exposure in the room condition for 48±4 hours. Only NFM18PC225B**3, measured after voltage treatment(Maximum Operating Temperature±3°C, Rated Voltage ×200%, 1hour) and exposure in the room condition 48±4 hours. Then measured after exposure in the room condition for 48±4 hours. If it's doubt, the mesuring has to be done after 1 hours curing at 150+0 / -10°C and 48±4 hours storage.				

1. Appearance and Dimensions (8mm-wide paper tape)

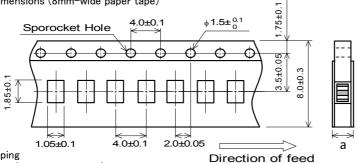

Chip thickness	Dimension
(T)	(a)
8.0	1.1max
0.6	0.9max

(in mm)

2. Specification of Taping

(1) Packing quantity (standard quantity)

4000 pcs. / reel

(2) Packing Method

Products shall be packaged in the cavity of the base tape and sealed by top tape and bottom tape.

(3) Sprocket Hole

The sprocket holes are to the right as the tape is pulled toward the user.

(4) Base tape and Top tape

The base tape and top tape have no spliced point.

(5) Cavity

There shall not be burr in the cavity.


(6) Missing components number

Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous. The specified quantity per reel is kept.

3. Pull Strength of Top Tape


5Nmin.(XOnly for NFM18PS, 8Nmin.)

4. Peeling off force of top tape



5. Dimensions of Leader-tape, Trailer and Reel

There shall be leader-tape (top tape and empty tape) and trailer-tape (empty tape) as follows.

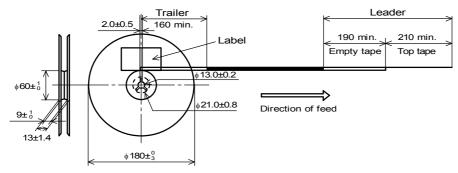

(in mm)

**∧**Caution

#### 1. Mounting density

Add special attention to radiating heat of products when mounting this product near the products with heating. The excessive heat by other products may cause deterioration of insulation resistance and excessive heat at this product, resulting in a fire.

#### 2. Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

- (1)Aircraft equipment (2)Aerospace equipment (3)Undersea equipment (4)Power plant control equipment
- (5)Medical equipment (6)Transportation equipment(automobiles, trains, ships, etc.) (7)Traffic signal equipment
- (8)Disaster prevention / crime prevention equipment (9)Data-processing equipment
- (10)Applications of similar complexity or with reliability requirements comparable to the applications listed in the above



Products can only be soldered with reflow.

This product is designed for solder mounting.

Please consult us in advance for applying other mounting method such as conductive adhesive.

#### 1. Flux and Solder

Flux	Use rosin-based flux, Do not use highly acidic flux (with chlorine content exceeding 0.2(wt)%).  Do not use water-soluble flux.					
	ther flux (except above) Please contact us for details, then use.					
Solder	Use Sn-3.0Ag-0.5Cu solder					
	Use of Sn-Zn based solder will deteriorate performance of products.					
	In case of using Sn-Zn based solder, please contact Murata in advance.					

#### 2. Note for Assembling


#### < Thermal Shock >


Pre-heating should be in such a way that the temperature difference between solder and products surface is limited to 100°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max.

#### 3. Attention Regarding P.C.B. Bending

The following shall be considered when designing P.C.B.'s and laying out products.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress for board warpage.






Products shall be located in the sideways direction (Length:a<b) to the mechanical stress.

(in mm)

(2) Products location on P.C.B. near seam for separation.



Products (A,B,C,D) shall be located carefully so that products are not subject to the mechanical stress due to warping the board. Because they may be subjected the mechanical stress in order of A>C>B≒D.

• Standard printing pattern of solder paste.

0.4

2 times

### 4. Pre-heating Temperature

Soldering shall be handled so that the difference between pre-heating temperature and solder temperature shall be limited to 100°C max. to avoid the heat stress for the products.

#### 5. Reflow Soldering

- 1) Soldering paste printing for reflow
- Standard thickness of solder paste: 100µm to 150µm.
- Use the solder paste printing pattern of the right pattern.


Cycle of reflow

• For the resist and copper foil pattern, use standard land dimensions.

### 2) Soldering Conditions

Standard soldering profile and the limit soldering profile is as follows.

The excessive limit soldering conditions may cause leaching of the electrode and / or resulting in the deterioration of product quality.



			30s~60s	Standard Profile
	90s±30s			Time.(s)
	Stand		dard Profile	Limit Profile
Pre-heating	Pre-heating 150°C ~ 1		180°C , 90s ± 30s	
Heating	above 220		0°C , 30s ~ 60s	above 230°C , 60s max.
Peak tempera	ture	245°C ± 3	°C	260°C , 10s

2 times



6. Reworking with Soldering iron

The following conditions shall be strictly followed when using a soldering iron.

Pre-heating : 150°C, 1 min

·Soldering iron output: 30W max.

Tip temperature : 350°C max.Soldering time : 3(+1,-0) s


ceramic material due to the thermal shock.

Tip diameter : φ3mm max.Times : 2times max.

Note: Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the

#### 7. Solder Volume

Solder shall be used not to be exceeded as shown below.



Accordingly increasing the solder volume, the mechanical stress to product is also increased. Excessive solder volume may cause the failure of mechanical or electrical performance.

#### 8. Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1) Cleaning temperature shall be limited to 60°C max. (40°C max. for Isopropyl alcohol (IPA))
- (2) Ultrasonic cleaning shall comply with the following conditions, with avoiding the resonance phenomenon at the mounted products and P.C.B.

Power : 20W / I max. Frequency : 28kHz to 40kHz Time : 5 minutes max.

(3) Cleaner

1. Cleaner

Isopropyl alcohol (IPA)

2. Aqueous agent

PINE ALPHA ST-100S

(4) There shall be no residual flux and residual cleaner after cleaning.

In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.

(5) Other cleaning

Please contact us.

#### 9. Operating Environment

Do not use this product under the following environmental conditions, on deterioration of the performance, such as insulation resistance may result from the use.

- (1) in the corrodible atmosphere (acidic gases, alkaline gases, chlorine, sulfur gases, organic gases and etc.)
- (2) in the atmosphere where liquid such as organic solvent, may splash on the products.
- (3) in the atmosphere where the temperature / humidity changes rapidly and it is easy to dew.


#### 10. Resin coating

The capacitance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.

#### 11. Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate. Excessive mechanical stress may cause cracking in the product.





Twisting




Motico

#### 12. Standard Land Dimensions

The chip EMI filter suppresses noise by conducting the high-frequency noise element to ground. Therefore, to get enough noise reduction, feed through holes which is connected to ground-plane should be arranged according to the figure to reinforce the ground-pattern.

< Standard land dimensions for reflow >

·Side on which chips are mounted



#### 13. Storage condition

(1) Storage period

Use the products within 12 months after delivered.

Solderability should be checked if this period is exceeded.

- (2) Storage environment condition
- Products should be stored in the warehouse on the following conditions.

Temperature: -10 to +40°C

Humidity: 15 to 85% relative humidity

No rapid change on temperature and humidity

- •Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.
- Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
- Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
- Products should be stored under the airtight packaged condition.
- (3) Delivery

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.



**⚠ NOTE** 

- (1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the agreed specifications.
- (3) We consider it not appropriate to include any terms and conditions with regard to the business transaction in the product specifications, drawings or other technical documents. Therefore, if your technical documents as above include such terms and conditions such as warranty clause, product liability clause, or intellectual property infringement liability clause, they will be deemed to be invalid.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Murata:

<u>NFM18PC224R0J3D</u> <u>NFM18PC474R0J3D</u> <u>NFM18PC105R0J3D</u> <u>NFM18PC104R1C3D</u> <u>NFM18PC225B1A3D</u> <u>NFM18PC225B0J3D</u>